


Hand Operated Vertical Blind System

Silent Gliss® 2810

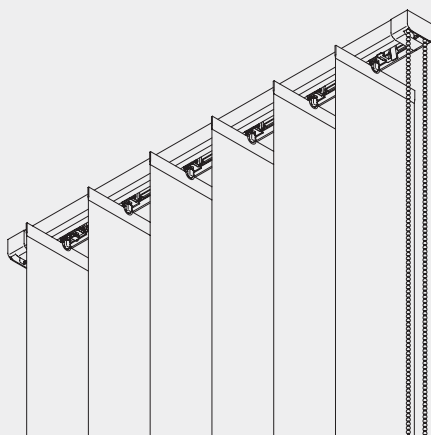

Product Information


- Mono controlled chain operated vertical blind system for domestic and contract applications.
- One of the slimmest vertical blind headrails on the market.
- Facility to move end stops for easy access to window (for cleaning).
- Quick repair of broken louvres.
- Easy change from left to right hand chain without disassembling system.
- Standard colours: anodised aluminium or white powder coated.
- Varied stacking arrangements - single, pair, multiple or asymmetric.
- Louvre widths 89mm or 127mm.
- Easy snapping on and off of the louvres.
- Automatic override to protect rotation elements.
- Maximum length of system is up to 5m (127mm) or 3.8m (89mm).
- Ceiling fix is recommended, but the system can also be wall fixed.
- Recess fixing possible.
- Wide and attractive fabric offer for louvres.
- Made to measure.
- Available with / without bottom link cords.
- Vertical Waves option available.




2810

Profile, Bending and Specification Information


Main profile



Recess profile for suspended ceilings



Recess profile



Specification Guide- download from www.silentgliss.co.uk (password required).

Silent Gliss 2810 mono controlled vertical blind system complete with extruded aluminium headrail. Finished in aluminium powder coated white/ silver anodised. System assembled complete with endless mono control chain and rotation elements to suit 127mm/89mm louvre width. Fabric to be chosen from Silent Gliss price group 1/2/3. Track top fixed with clamp 2616 at 30cm centres plus 1/face fixed with bracket 2616/3134-9 at 30cm centres plus 1.off.....overall lengthoverall drop.

How to Measure

For guidance on measuring, please complete a Silent Gliss measure sheet, available from head office or www.silentgliss.co.uk (password required).



2810

System Dimensions



5m (127mm)
3.8m (89mm)



40cm
(single stack)















200g per louvre
(incl. bottom weight)



4m







Stack Sizes (each stack)

|  | |  (cm) | | | | | | | | | | |
|---|---|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 80 | 100 | 120 | 140 | 160 | 180 | 200 | 220 | 240 | 260 | 280 |
| 127 |  | 25 | 27 | 30 | 33 | 36 | 39 | 42 | 45 | 48 | 51 | 54 |
| |  | 19 | 21 | 22 | 24 | 25 | 27 | 28 | 30 | 31 | 33 | 34 |
| 89 |  | 26 | 29 | 33 | 38 | 41 | 45 | 50 | 53 | 57 | 62 | 65 |
| |  | 18 | 20 | 21 | 24 | 26 | 27 | 30 | 32 | 33 | 36 | 38 |


|  | |  (cm) | | | | | | | | | | |
|---|---|--|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| | | 300 | 320 | 340 | 360 | 380 | 400 | 420 | 440 | 460 | 480 | 500 |
| 127 |  | 57 | 60 | 63 | 66 | 69 | 72 | 75 | 78 | 81 | 84 | 87 |
| |  | 36 | 37 | 38 | 40 | 41 | 43 | 44 | 46 | 47 | 49 | 50 |
| 89 |  | 69 | 74 | 77 | 81 | 86 | | | | | | |
| |  | 39 | 42 | 44 | 45 | 48 | | | | | | |

The stack sizes above don't apply for the system option Vertical Waves. Please contact Silent Gliss for further information.

Stacking Variations / System Options


- A:  3 stacks in 1 direction (can also be asymmetric)
 B:  Pair stack, asymmetrical
 C:  Asymmetrical in 1 direction
 D:  Pair stack, equal
 E:  Single stack
 F:  Centre stack

Vertical Waves



2810


The system can be optionally equipped with the system option Vertical Waves.

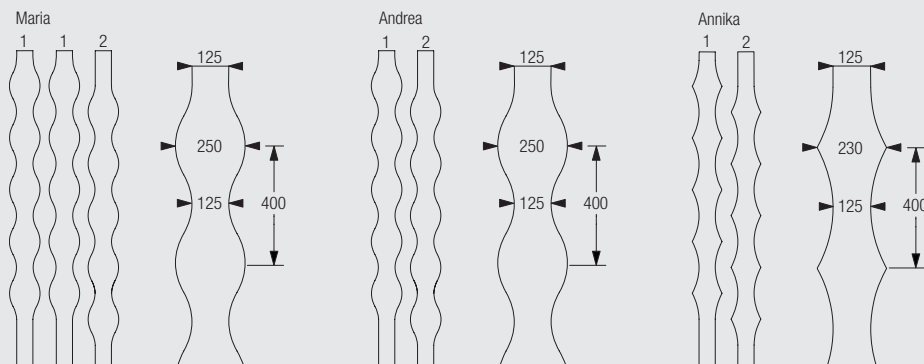


Three exceptional designs, Maria, Andrea and Annika, are available.

Fitting Information

Bracket positioning

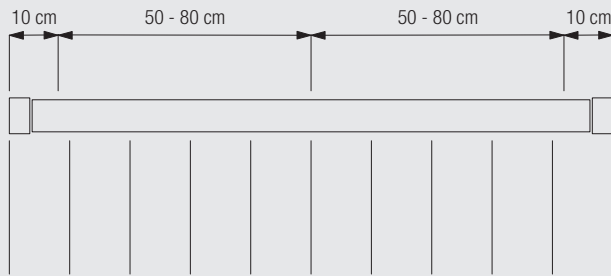

Click-in bracket 2616

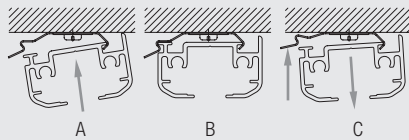

- A: Hook in profile from the front
B: Push upwards profile until it clicks in
C: Push lever for removal.


Fitting Options

CAD download from www.silentgliss.co.uk (password required).


Ceiling fix with bracket 2616



2810




| | X (mm) |
|---------|--------|
| Louvres | |
| 89mm | 65 |
| 127mm | 85 |




2616
Bracket


Recess fix with recess profile 2615



| | X (mm) |
|---------|--------|
| Louvres | |
| 89mm | 65 |
| 127mm | 85 |




2615
Profile





5118
Wedge for recess
profile

Suggested rebate size for 2615 profile is 52 x 23mm.


Recess fix in suspended ceiling with recess profile 2614 and hanger 6268





| | X (mm) |
|---------|--------|
| Louvres | |
| 89mm | 65 |
| 127mm | 85 |



Wall fix with brackets 3135-38 and bracket 2616

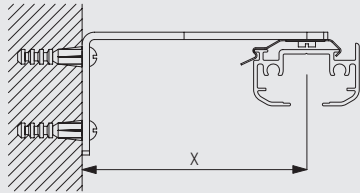

| | X (mm) | W (mm) | Y (mm) | Z (mm) |
|------|--------|--------|--------|--------|
| 3134 | n/a | n/a | n/a | n/a |
| 3135 | 71 | - | 50 | 50 |
| 3136 | 91 | - | 50 | 50 |
| 3137 | 111 | - | 80 | 50 |
| 3138 | 141 | 60 | 80 | 60 |
| 3139 | n/a | n/a | n/a | n/a |



Standard Accessories


0998 Safety Cord Retainer



2604 Guide



2608 Endstop for 2601



2611 Stopper



2616 Bracket



2623 Rotation element set (127mm)



2627 Cover




2865 Bead chain connector



3340 Cord/Chain weight (not for use with 4845 metal bead chain)



2601 Profile




2605 Top clip (127mm)



2610 Endstop



2612 Brake



2620 Pilot runner



2625 Rotation element set (89mm)



2813 Top clip (89mm)



2872 Operating chain



2810

Optional Accessories

2614 Profile




2618 Shaft




2821 Spacer (65mm)



3135 Extension bracket (80mm)



3137 Extension bracket (120mm)




3799 Cord Tidy



6268 Hanger



2615 Profile




2624 Adjustment set (101mm)




3133 Bracket cover (60mm)



3136 Extension bracket (100mm)



3138 Extension bracket (150mm)




5118 Wedge for recess profile



3133L Extended bracket cover for 3138/9



Louvre Accessories



2810

The drawing above illustrates the distance between the top of the louvre and the profile / ceiling.


2471 Bottom weight (127mm)



2479 Bottom link chain (127mm)



2605 Top clip (127mm)



2607 Top clip (89mm reduced gap, not SGGB standard)



2473 Bottom weight (89mm)



2481 Bottom link chain (89mm)



2606 Top clip (127mm reduced gap, not SGGB standard)



2813 Top clip (89mm)

