


Chain Operated Roller Blind System

Silent Gliss® 4910

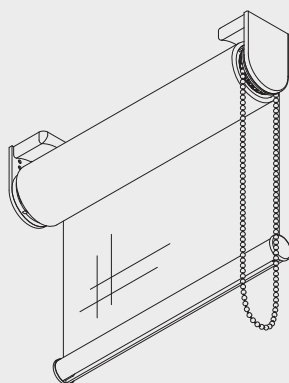


Product Information

- Silent and smooth chain operated roller blind system for residential and contract applications
- Effortless and elegant operation with stainless steel bead chain
- Blind can be stopped at any given position
- Easy ceiling, wall or recess fix
- Optional continuous installation profile in white as standard with easy click in brackets for fast fixing
- Optional adjustable end stop allows upper or lower limit setting after installation
- Side-by-side version with centre support bracket and minimal light gap
- Side guide option available
- Choice of bottom bar designs
- Optional metal design brackets with or without continuous headrail
- Optional stop controller mechanism halts the blind at any given position - ideal for very tall windows or contracts where all blinds must be at the same level from the outside



4910

Profile and Specification Information




Specification Guide - download from www.silentgliss.co.uk (password required).

Silent Gliss 4910 chain operated roller blind system. Fixed to wall/ceiling/inside recess with 3044 clamp or optional 10539 click bracket and installation profile 10534 and endcovers 10574. Aluminium bottom bar 4221 in white/silver as standard (other shape options available). Optional adjustable endstop allows upper or lower limit setting. Fabric to be selected from Silent Gliss range.

How to Measure

Single system

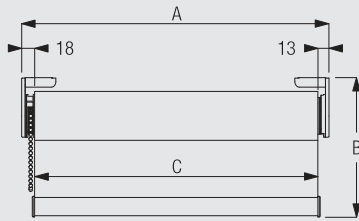


A: system width (incl. bracket covers)
B: system drop
C: fabric width

Please note: measurements differ when side-guide option is used.



910

Side-by-side systems (unconnected) - not available with design bracket option

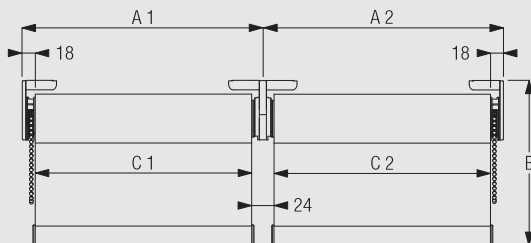

A: system width (incl. bracket covers)
B: system drop
C: fabric width

Please note: measurements differ when side-guide option is used.

System Dimensions



Single System: 2.4m



Single System: 60cm



3 m



7.2m²



3kg

Maximum system width to drop ratio should not exceed 3.5:1

Please note: maximum system width/drop also depends on the fabric type.

Maximum system drop

Wall fitting:

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	290	270	250	230	220


Ceiling fitting:

Fabric thickness	mm	0.15	0.20	0.25	0.30	0.35	0.40	0.45	0.50	0.55	0.60	0.65	0.70	0.75	0.80
Max. system drop	cm	300	300	300	300	300	300	300	300	300	300	300	300	300	280

To obtain fabric thickness information for a specific Silent Gliss fabric, please refer to the Silent Gliss fabric binder or contact Silent Gliss.

System Options


Side-by-side fixing of two systems




10632 Intermediate cover

Side guides for stabilising blind system and sloped applications (up to 15° incline)

Single system

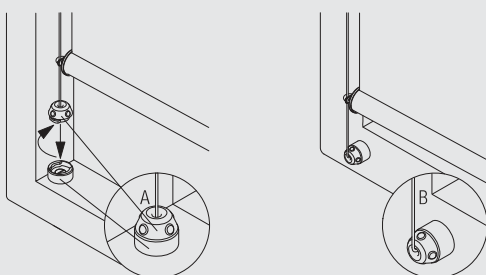

Double system

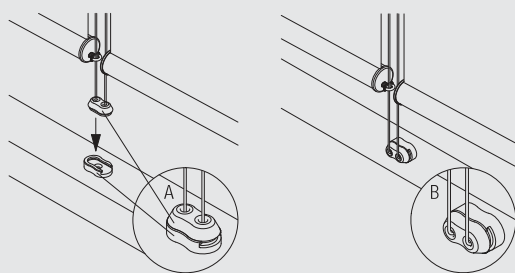


A: Fitting of side guides inside window frame
B: Fitting of side guides onto front of window frame



4910

Adjustable end stop




Optional adjustable end stop allows upper or lower limit setting after installation to avoid bottom bar hitting window ledge.

Stop Controller

The stop controller mechanism halts the blind at any given position - ideal for very tall windows or contracts where all blinds must be at the same level from the outside

Fitting Information

Positioning of system

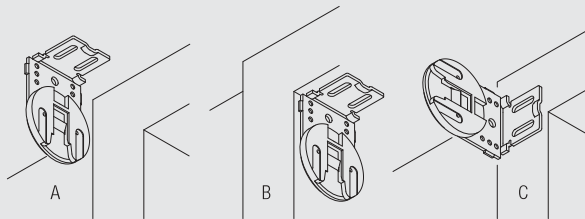


A: Ceiling Fixing
B: Recess Fixing
C: Wall Fixing

Easy loading and removal of the blind




4910

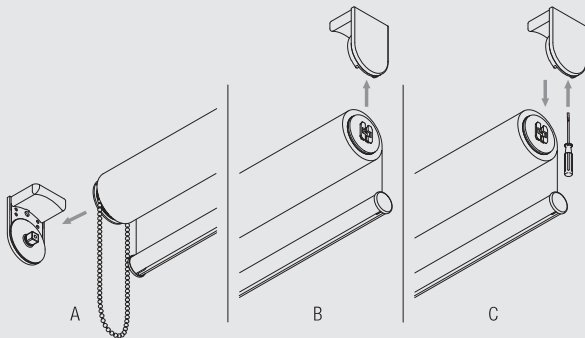

A: Insert roller blind into support bracket (drive side)
B: Click roller blind into support bracket (click side)
C: Use small screwdriver to remove roller blind

Alternative fixing with continuous installation profile (optional)

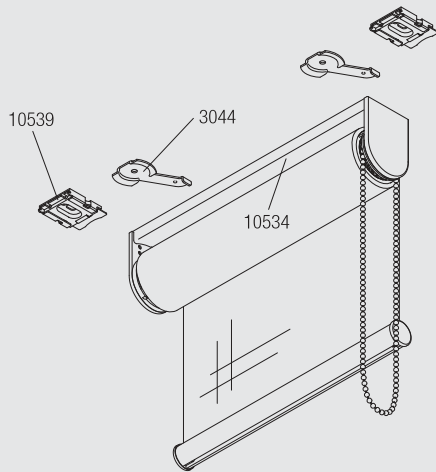


System can be pre-mounted on continuous installation profile 10534 for fast fitting on site. Just mount the system with pre-fixed clamps 3044 or click brackets 10539.

Fitting Options







CAD download available from www.silentgliss.co.uk (password required)

Ceiling fix with brackets

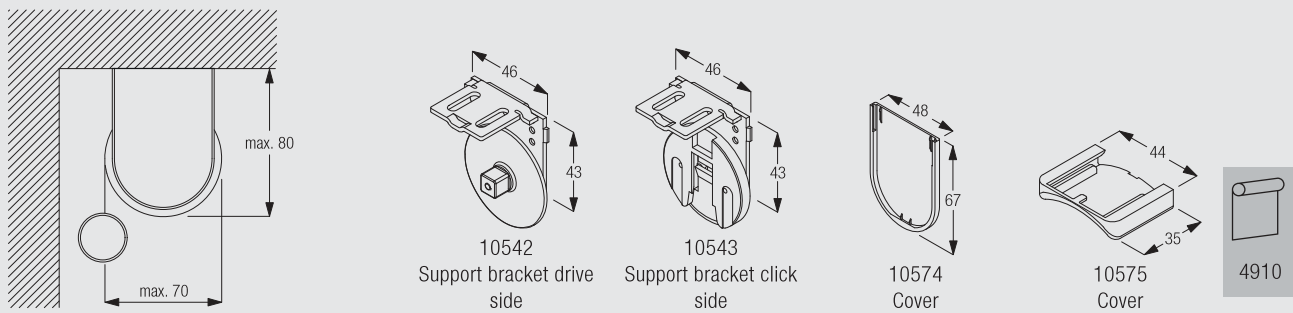







All measurements are based on the maximum system dimensions.

Ceiling fix with optional installation profile and clamps 3044





All measurements are based on the maximum system dimensions.

Ceiling fix with optional installation profile and click bracket 10539




All these measures are based on the maximum system dimensions.

Wall fix with brackets




10542
Support bracket drive
side



10543
Support bracket click
side




10574
Cover




10575
Cover

All measurements are based on the maximum system dimensions.


Wall fix with optional installation profile and clamps 3044




3044
Clamp




10534
Profile



10542
Support bracket drive
side



10543
Support bracket click
side




10574
Cover




All measurements are based on the maximum system dimensions.

Wall fix with optional installation profile and click bracket 10539

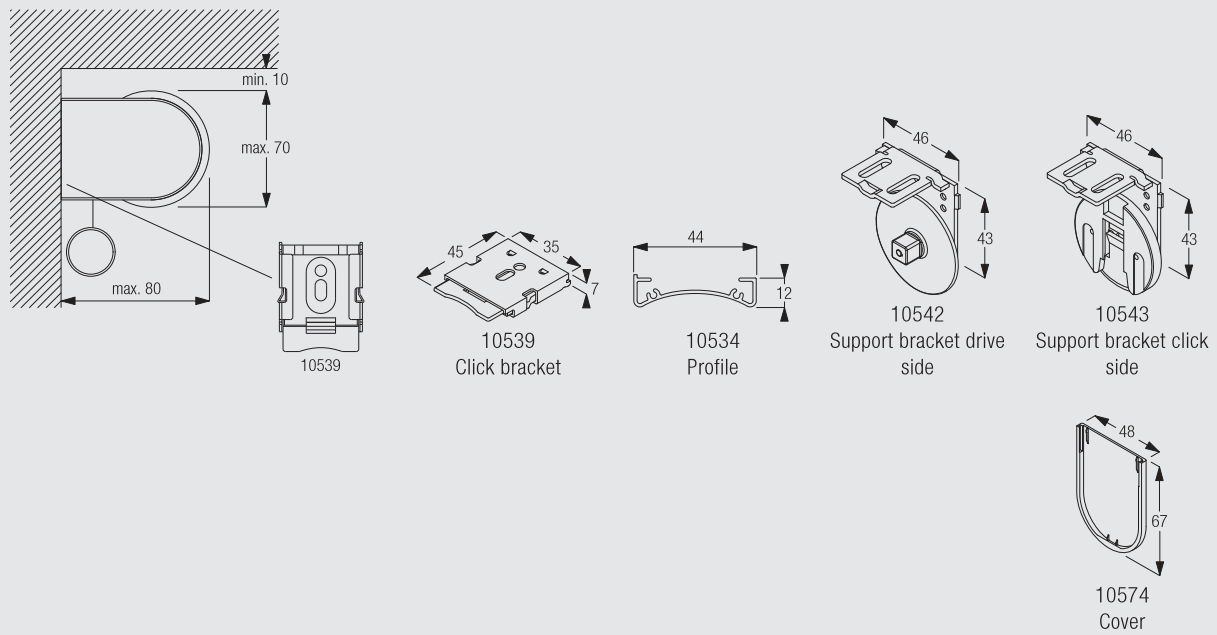







All measurements are based on the maximum system dimensions.

Recess fix with brackets

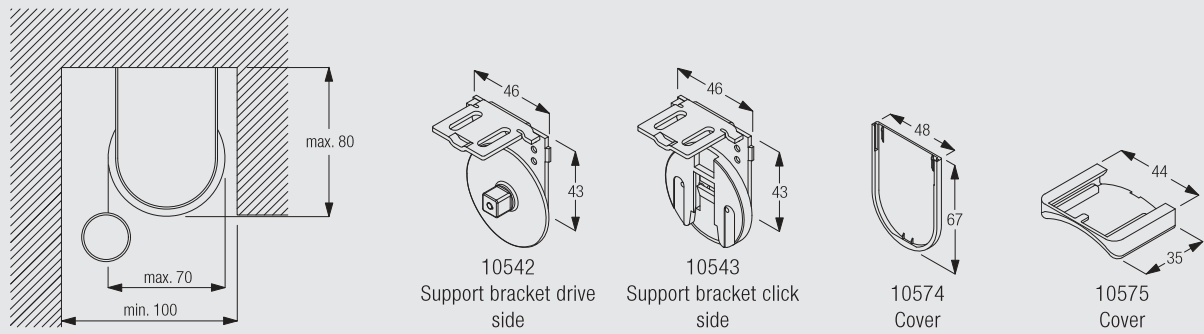







All measurements are based on the maximum system dimensions.

Recess fix with optional installation profile and clamps 3044

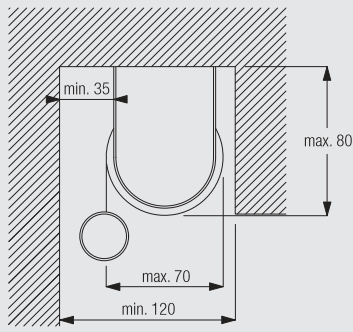




All measurements are based on the maximum system dimensions.

Recess fix with optional installation profile and click bracket 10539




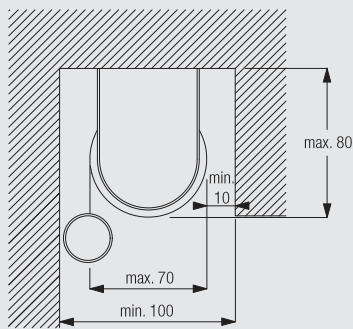


All measurements are based on the maximum system dimensions.

Fitting with optional side guides



Fitting with optional side guides (side-by-side installation)



4910

Standard Accessories

4221 Bottom bar



10400 Safety Cord Retainer



10530 Stainless steel bead chain (ø 4mm)



10531 Profile



10542 Support bracket drive side



10543 Support bracket click side



10574 Cover



10575 Cover



10639 End cover round



Optional Accessories

2226 Bead chain stop







3044 Clamp




8235	Wire base short		8236	Wire base long	
8237	Wire holder		8249	Locking ring	
10387	Cover for metal bracket		10534	Profile	
10535	Design end cover round (metal)		10539	Click bracket	
10559	End stop left		10560	End stop right	
10632	Intermediate cover		10633	Bottom bar rectangle	
10634	Bottom bar oval		10635	End cover rectangle	
10636	End cover rectangle (side guide)		10637	End cover oval	
10638	End cover oval (side guide)		10640	End cover round (side guide)	
10641	Eyelet (side guide)		10642	Wire holder (side guide)	
10643	Wire \varnothing 1.3mm x 4.2m (side guide)		10669	Double base long (side guide)	
10673	Double base short (side guide)		10701	Double wire holder (side guide)	
10703	Design bracket click side		10704	Design bracket drive side	
10706	Wire \varnothing 1.3mm x 2.6m (side guide)		10707	Cushion	

4910


Useful Measurements

4221	Bottom bar		10632	Intermediate cover	
10633	Bottom bar rectangle		10634	Bottom bar oval	


10635 End cover rectangle




10637 End cover oval




10639 End cover round



10703 Design bracket click side



10704 Design bracket drive side



4910